

COLOR UNO20GY


Thermal Transfer Ribbon

RIBBON SPECIFICATION SHEET

UN series / Color

UN020GY, the general purpose WAX, is designed for use on almost all the printer, and cover the wide range of labelstocks.

Ribbon Properties	
Type of Ink	Wax
Ribbon Thickness	9.0±0.5μm
Base Film	Polyester (4.5±0.3μm)
Ink Color	Gray
Print Speed	Up To 10 inch/sec
Ink Melting Point	75°C
Recording Energy	12mj / sq.mm

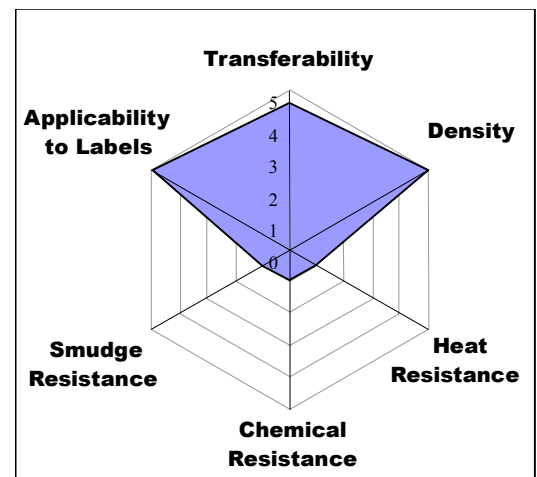

Properties of Printed Image	
Pantone Color	Cool Gray 11C
Recommended Label Stock	Coated Paper, Gloss Paper, Synthetic Paper
Usage Condition	5 to 35°C / 20 to 80%RH
Storage Condition	0 to 40°C / 20 to 80%RH

The numerical value indicated by this sheet is catalog value, and is not guarantee value. This information shown above is the tentative specifications, and subject to change without notice.



UNION CHEMICAR CO., LTD

3-10, Shodaitajika, Hirakata, Osaka 573-1132 Japan

TEL 81-72-856-3321 FAX 81-72-856-3378



ISO14001
EM2661



ISO9001
JQA-1784