

# COLOR UNO20GN

## Thermal Transfer Ribbon


### RIBBON SPECIFICATION SHEET

UN series / Color

**UN020GN, the general purpose WAX, is designed for use on almost all the printer, and cover the wide range of labelstocks.**

#### Ribbon Properties

Type of Ink	Wax
Ribbon Thickness	9.5±0.5μm
Base Film	Polyester (4.5±0.3μm)
Ink Color	Green
Print Speed	Up To 10 inch/sec
Ink Melting Point	75°C
Recording Energy	12mj / sq.mm

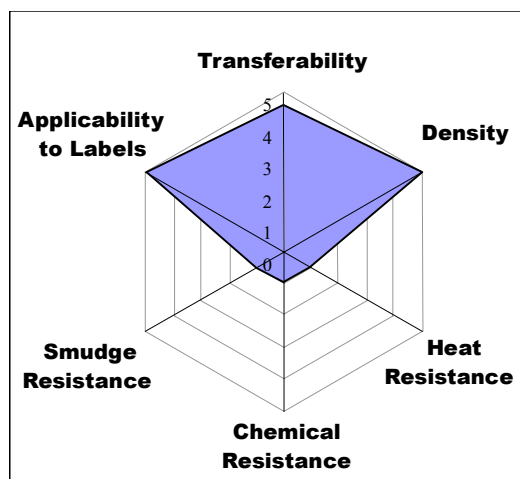

#### Properties of Printed Image

Pantone Color	3405C
Recommended Label Stock	Coated Paper, Gloss Paper, Synthetic Paper
Usage Condition	5 to 35°C / 20 to 80%RH
Storage Condition	0 to 40°C / 20 to 80%RH

The numerical value indicated by this sheet is catalog value, and is not guarantee value. This information shown above is the tentative specifications, and subject to change without notice.



**UNION CHEMICAL CO., LTD**

3-10, Shodaitajika, Hirakata, Osaka 573-1132 Japan

TEL 81-72-856-3321 FAX 81-72-856-3378



ISO14001  
EM2661



ISO9001  
JQA-1784