

COLOR UNO20VT


Thermal Transfer Ribbon

RIBBON SPECIFICATION SHEET

UN series / Color

UN020VT, the general purpose WAX, is designed for use on almost all the printer, and cover the wide range of labelstocks.

| Ribbon Properties | |
|-------------------|-----------------------|
| Type of Ink | Wax |
| Ribbon Thickness | 9.5±0.5μm |
| Base Film | Polyester (4.5±0.3μm) |
| Ink Color | Violet |
| Print Speed | Up To 10 inch/sec |
| Ink Melting Point | 75°C |
| Recording Energy | 12mj / sq.mm |

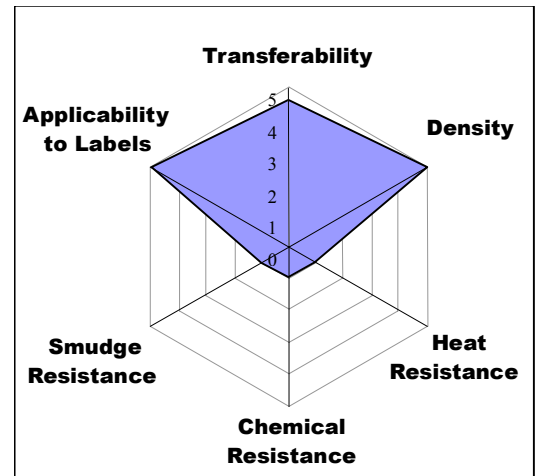

| Properties of Printed Image | |
|-----------------------------|--|
| Pantone Color | 2735C |
| Recommended Label Stock | Coated Paper, Gloss Paper, Synthetic Paper |
| Usage Condition | 5 to 35°C / 20 to 80%RH |
| Storage Condition | 0 to 40°C / 20 to 80%RH |

The numerical value indicated by this sheet is catalog value, and is not guarantee value. This information shown above is the tentative specifications, and subject to change without notice.



UNION CHEMICAR CO., LTD

3-10, Shodaitajika, Hirakata, Osaka 573-1132 Japan

TEL 81-72-856-3321 FAX 81-72-856-3378



ISO14001
EM2661



ISO9001
JQA-1784