

RIBBON SPECIFICATION SHEET


UN series / Color

COLOR UN020WT

Thermal Transfer Ribbon

UN020WT, the general purpose WAX, is designed for use on almost all the printer, and cover the wide range of labelstocks.

Ribbon Properties	
Type of Ink	Wax
Ribbon Thickness	12.0±0.5μm
Base Film	Polyester (5.7±0.3μm)
Ink Color	White
Print Speed	Up To 8 inch/sec
Ink Melting Point	75°C
Recording Energy	13mj / sq.mm

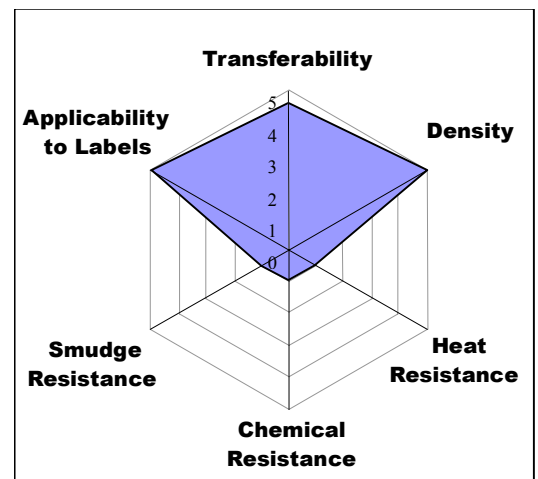

Properties of Printed Image	
Recommended Label Stock	Coated Paper, Gloss Paper, Synthetic Paper
Usage Condition	5 to 35°C / 20 to 80%RH
Storage Condition	0 to 40°C / 20 to 80%RH

The numerical value indicated by this sheet is catalog value, and is not guarantee value. This information shown above is the tentative specifications, and subject to change without notice.



UNION CHEMICAL CO., LTD

3-10, Shodaitajika, Hirakata, Osaka 573-1132 Japan

TEL 81-72-856-3321 FAX 81-72-856-3378



ISO14001
EM2661



ISO9001
JQA-1784